### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

### (19) World Intellectual Property Organization

International Bureau



## 

(43) International Publication Date 1 September 2005 (01.09.2005)

PCT

# (10) International Publication Number WO 2005/080765 A1

- (51) International Patent Classification<sup>7</sup>: F01P 3/20, 7/16, B60K 6/04, F02D 13/06, 17/02, F02B 75/22
- (21) International Application Number:

PCT/IB2005/000225

- (22) International Filing Date: 31 January 2005 (31.01.2005)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 2004-036304

13 February 2004 (13.02.2004) JP


- (71) Applicant (for all designated States except US): TOYOTA JIDOSHA KABUSHIKI KAISHA? [JP/JP]; 1, Toyotacho, Toyota-shi, Aichi-ken 471-8571 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): KAITA, Keiji

[JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha of Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP). ABE, Shinichi [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, of Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: COOLING SYSTEM

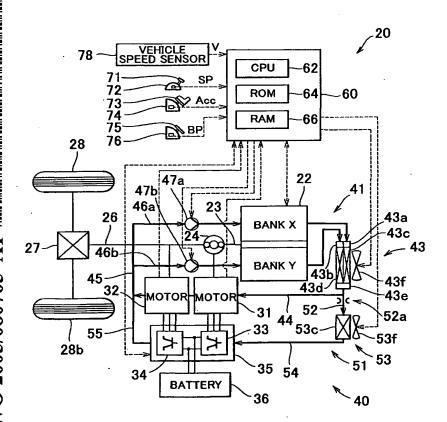

(57) Abstract: A cooling system (40) includes a first cooling system (41) in which coolant is supplied from a radiator (43) to a motor (31, 32) so as to cool the motor (31, 32), and then the coolant is supplied to banks (X, Y) of an engine (22) through a circulation passage (45) and split flow passages (46a, 46b) so as to cool the engine (22); and a second cooling system (51) in which the coolant delivered from the radiator (43) through a branch passage (52) is further cooled by a radiator (53), and the cooled coolant is supplied to a drive circuit (35) so as to cool the drive circuit (35). With this configuration, it is possible to efficiently cool the motor (31, 32), the engine (22), and the drive circuit (35) whose suitable operating temperatures are different from each other, and to make the configuration of the cooling system simple.

WO 2005/080765 A1

### WO 2005/080765 A1



FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

#### Published:

with international search report

### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## **CORRECTED VERSION**

# (19) World Intellectual Property Organization International Bureau



## 

### (43) International Publication Date 1 September 2005 (01.09,2005)

#### **PCT**

# (10) International Publication Number WO 2005/080765 A1

- (51) International Patent Classification<sup>7</sup>: F01P 3/20, 7/16, B60K 6/04, F02D 13/06, 17/02, F02B 75/22
- (21) International Application Number:

PCT/IB2005/000225

- (22) International Filing Date: 31 January 2005 (31.01.2005)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2004-036304

13 February 2004 (13.02.2004) JP


- (71) Applicant (for all designated States except US): TOY-OTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): KAITA, Keiji [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha of Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP). ABE, Shinichi [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, of Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Published:

with international search report

[Continued on next page]

(54) Title: COOLING SYSTEM

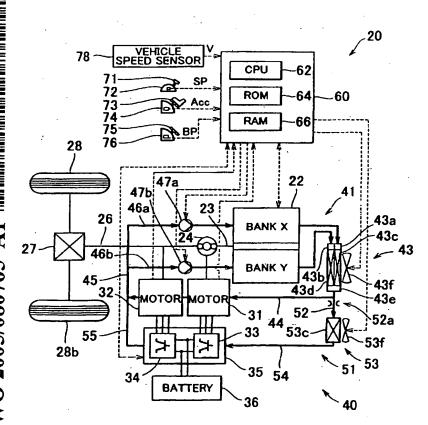

(57) Abstract: A cooling system (40) includes a first cooling system (41) in which coolant is supplied from a radiator (43) to a motor (31, 32) so as to cool the motor (31, 32), and then the coolant is supplied to banks (X, Y) of an engine (22) through a circulation passage (45) and split flow passages (46a, 46b) so as to cool the engine (22); and a second cooling system (51) in which the coolant delivered from the radiator (43) through a branch passage (52) is further cooled by a radiator (53), and the cooled coolant is supplied to a drive circuit (35) so as to cool the drive circuit (35). With this configuration, it is possible to efficiently cool the motor (31, 32), the engine (22), and the drive circuit (35) whose suitable operating temperatures are different from each other, and to make the configuration of the cooling system simple.

WO 2005/080765 A1

## 

(48) Date of publication of this corrected version:

23 February 2006

(15) Information about Correction: see PCT Gazette No. 08/2006 of 23 February 2006, Section II For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.